


RERIS S 2200-3500

Torno vertical

APLICACIONES:

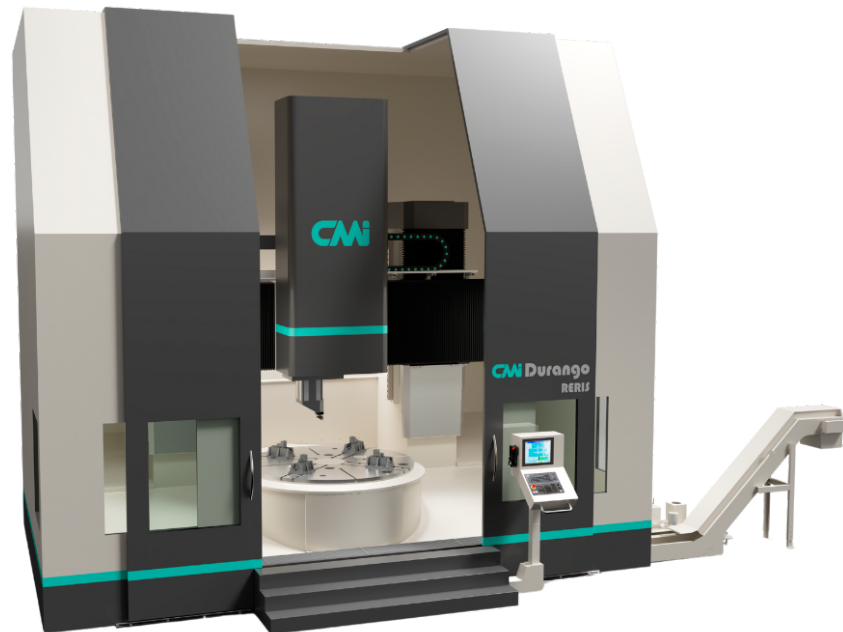

TORNO VERTICAL RERIS S


Características técnicas

Ø pieza máx (mm.)	2600	2900	3400	3900
Ø plato (mm.)	2200	2500	3000	3500
Peso máx (Tn)	25	30	36	36
RPM máx. plato	250rpm	225rpm	180rpm	128rpm
Potencia de torneado (kW)	71	71	71	71
Desplazamiento vertical travesaño "W" (mm.) - (Opcional)	1000 / 2000			
Recorrido de eje "Z" (mm.)	1200 / 1500 / 2000			
Sección Ram (mm.)	280x280 (eje Z: 1200) / 350x350 (eje Z: 1500 / 2000)			
Velocidad eje "X" (mm/min.)	10 / 15 m/min.			
Velocidad eje "Z" (mm/min.)	10 / 15 m/min.			


Cabezales



CABEZAL
PORTAHERRAMIENTAS



AUTOMATIC
TURNING BLOCK




FIXED
TURNING BLOCK

Almacén de herramientas

Número de herramientas	40 / 60 / 80 / 100
Peso herramientas soportable	20 kg / 35 kg
Tipos de herramientas	ISO 50 / 60 HSK-63 / 80 / 100... CAPTO C-6 / -8 / -10...


Otros accesorios y herramientas

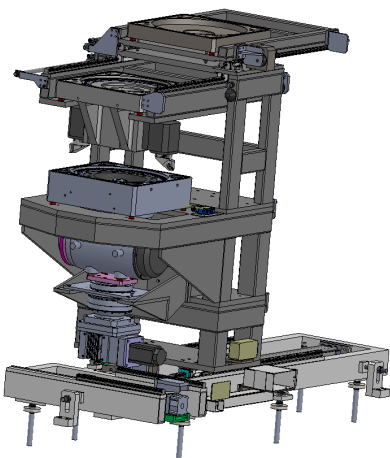

CAMBIADOR DE
CABEZALES HTA. Y PIEZA



INTERCAMBIADOR PALLET

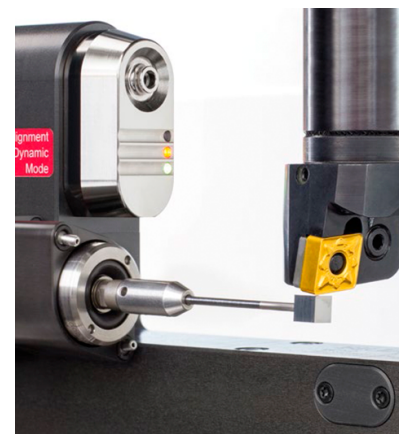

MEDIDOR HTA. Y PIEZA