


RERIS M 4000-6000

Vertical Lathe

APPLICATIONS:

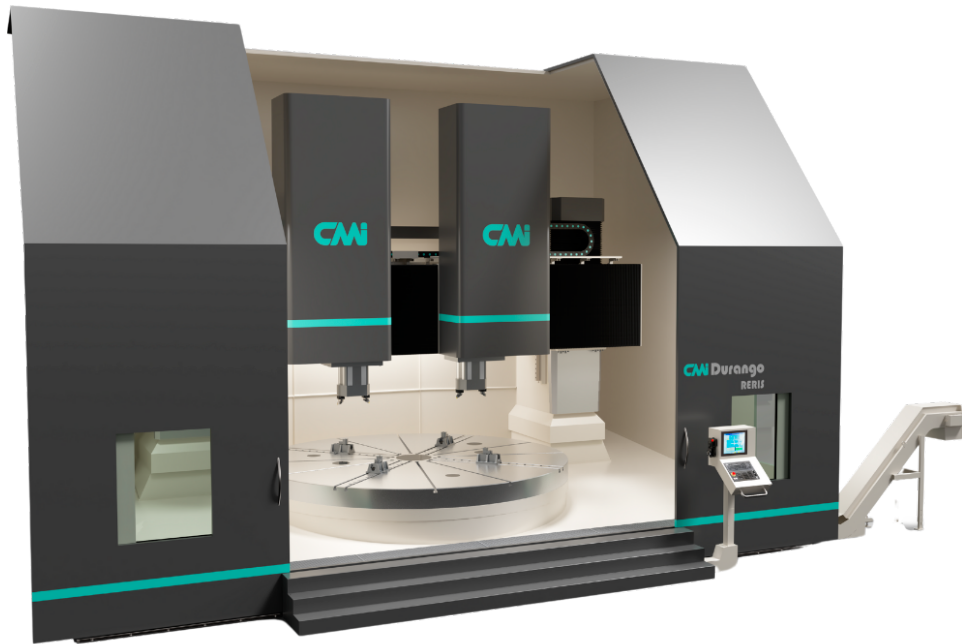

VERTICAL LATHE RERIS M


Technical specifications

Max. workspace diameter (mm)	4500	5000	5500	6100	6100
Chuck diameter (mm)	4000	4500	5000	5500	6000
Max weight (Tons)	80	80	100	120	150
Max. chuck speed (RPM)	118rpm	100rpm	95rpm	78rpm	75rpm
Turning power (kW)	100	100	100	130	130
Crossrail vertical travel "W" (mm) - (Optional)	1000 / 2000				
Z-axis travel (mm)	1200 / 1500 / 2000				
Ram section (mm)	350x350 (Z-axis: 1200) / 400x400 (Z-axis: 1500 / 2000)				
X-axis feed rate (mm/min)	10 / 15 m/min				
Z-axis feed rate (mm/min)	10 / 15 m/min				


Heads



TOOL
HOLDER HEAD



AUTOMATIC
TURNING BLOCK




FIXED
TURNING BLOCK

Tool warehouse

Number of tools	40 / 60 / 80 / 100
Tool weight capacity	20 kg / 35 kg
Tool types	ISO 50 / 60 HSK-63 / 80 / 100... CAPTO C-6 / -8 / -10...


Other accesories and tools

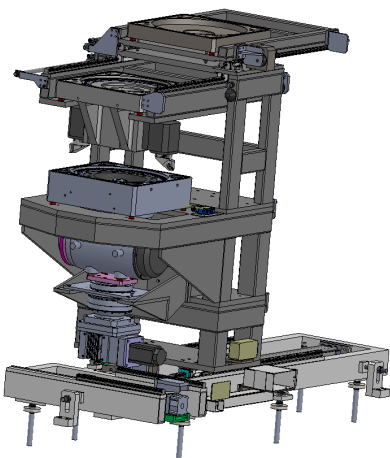

HEAD AND
WORKPIECE CHANGER



PALLET
EXCHANGER

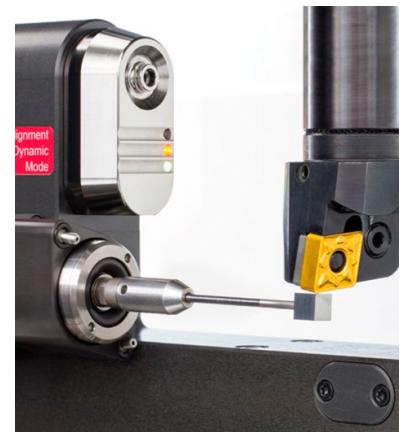

TOOL AND
WORKPIECE PROBE