


RERIS S 2200-3500

Vertical Lathe

APPLICATIONS:

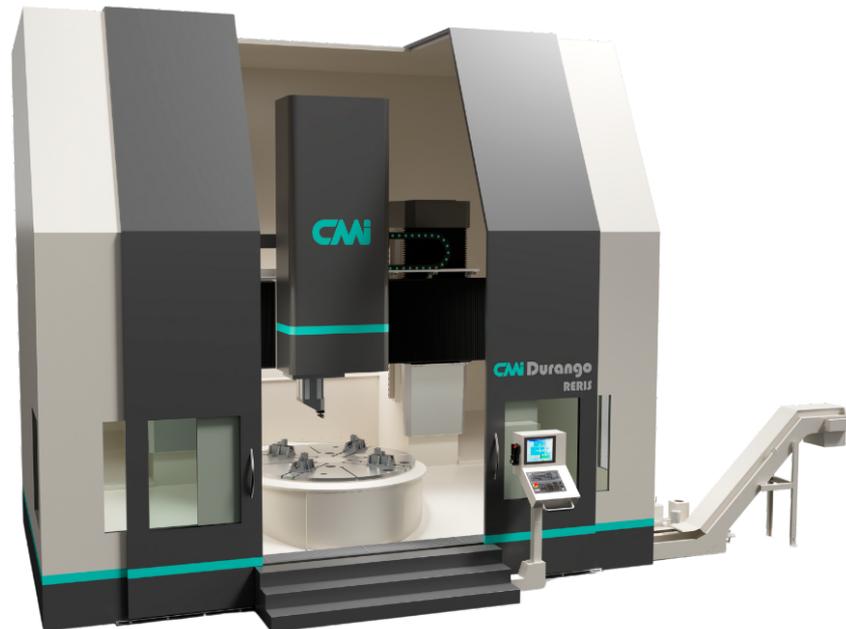

VERTICAL LATHE RERIS S Technical specifications

| | | | | |
|---|--|------|------|------|
| Max. workpiece diameter (mm) | 2600 | 2900 | 3400 | 3900 |
| Chuck diameter (mm) | 2200 | 2500 | 3000 | 3500 |
| Max. weight (Tons) | 25 | 30 | 36 | 36 |
| Max. chuck speed (RPM) | 250 | 225 | 180 | 128 |
| Turning power (kW) | 71 | 71 | 71 | 71 |
| Crossrail vertical travel "W" (mm) - (Optional) | 1000 / 2000 | | | |
| Z-axis travel (mm) | 1200 / 1500 / 2000 | | | |
| Ram section (mm) | 280x280 (Z axis: 1200) / 350x350 (Z-axis: 1500 / 2000) | | | |
| X-axis feed rate (m/min) | 10 / 15 | | | |
| Z-axis feed rate (m/min) | 10 / 15 | | | |

Heads



TOOL
HOLDER HEAD



AUTOMATIC
TURNING BLOCK



FIXED
TURNING BLOCK


Tool warehouse

Number of tools 40 / 60 / 80 / 100

Tool weight capacity 20 kg / 35 kg

Tool types ISO 50 / 60
HSK-63 / 80 / 100...
CAPTO C-6 / -8 / -10...


Other accessories and tools

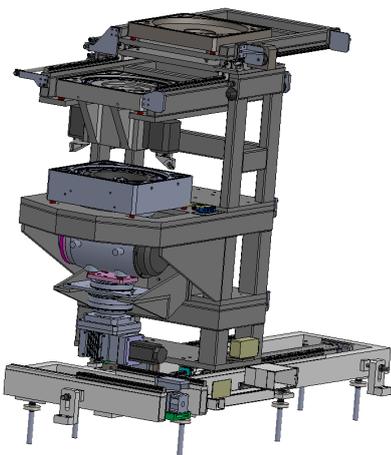

HEAD AND
WORKPIECE CHANGER



PALLET
EXCHANGER

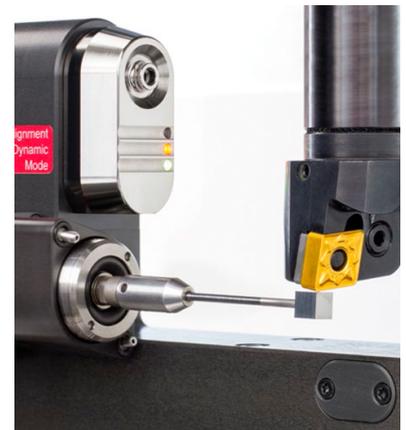

TOOL AND
WORKPIECE PROBE