


RERIS S 2200-3500

Torno vertical

APLICACIONES:

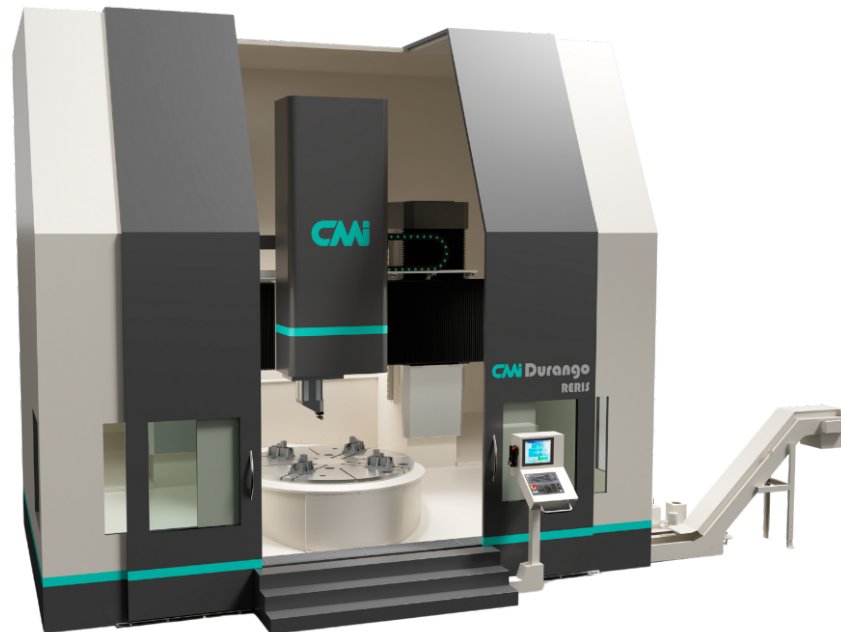

TORNO VERTICAL RERIS S


Características técnicas

Ø pieza máx (mm)	2600	2900	3400	3900
Ø plato (mm)	2200	2500	3000	3500
Peso máx (Tn)	25	30	36	36
RPM máx. plato	250	225	180	128
Potencia de torneado (kW)	71	71	71	71
Desplazamiento vertical travesaño "W" (mm) - (Opcional)	1000 / 2000			
Recorrido de eje "Z" (mm)	1200 / 1500 / 2000			
Sección Ram (mm)	280x280 (eje Z: 1200) / 350x350 (eje Z: 1500 / 2000)			
Velocidad eje "X" (m/min)	10 / 15			
Velocidad eje "Z" (m/min)	10 / 15			


Cabezales



CABEZAL
PORTAHERRAMIENTAS



AUTOMATIC
TURNING BLOCK



FIXED
TURNING BLOCK

Almacén de herramientas

Número de herramientas

40 / 60 / 80 / 100


Peso herramientas soportable

20 kg / 35 kg

Tipos de herramientas

ISO 50 / 60
HSK-63 / 80 / 100...
CAPTO C-6 / -8 / -10...


Otros accesorios y herramientas

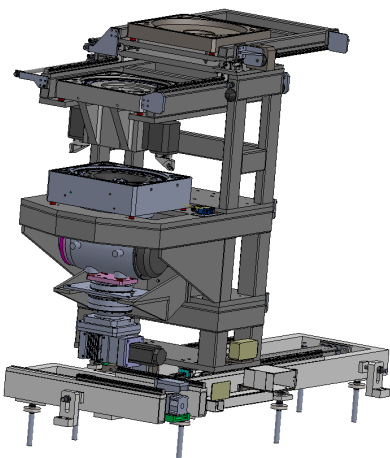

CAMBIADOR DE
CABEZALES HTA. Y PIEZA



INTERCAMBIADOR PALLET

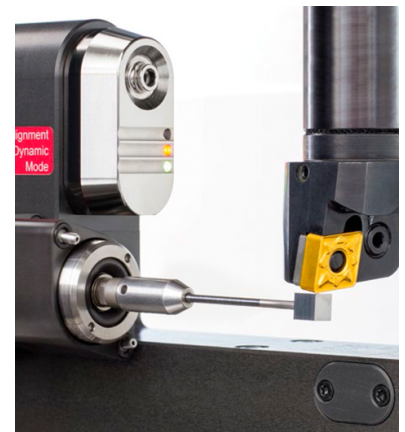

MEDIDOR HTA. Y PIEZA